

Additional Date/Spec Sheet

Cetop 5 NG10 ES5C34P Subplate | A - B - P - T on Rear/Bottom 3/4" BSP

SUBPLATE

TYPE ES5C34P AND ES5C34PL

BASE SINGOLA


TIPO ES5C34P ED ES5C34PL



29

SUBPLATE
BASE SINGOLA

Subplate, A-B-P-T on rear = 3/4"G. Weight = 4 kg
Base singola con utilizzi A-B-P-T posteriori da 3/4"G. Peso = 4 Kg

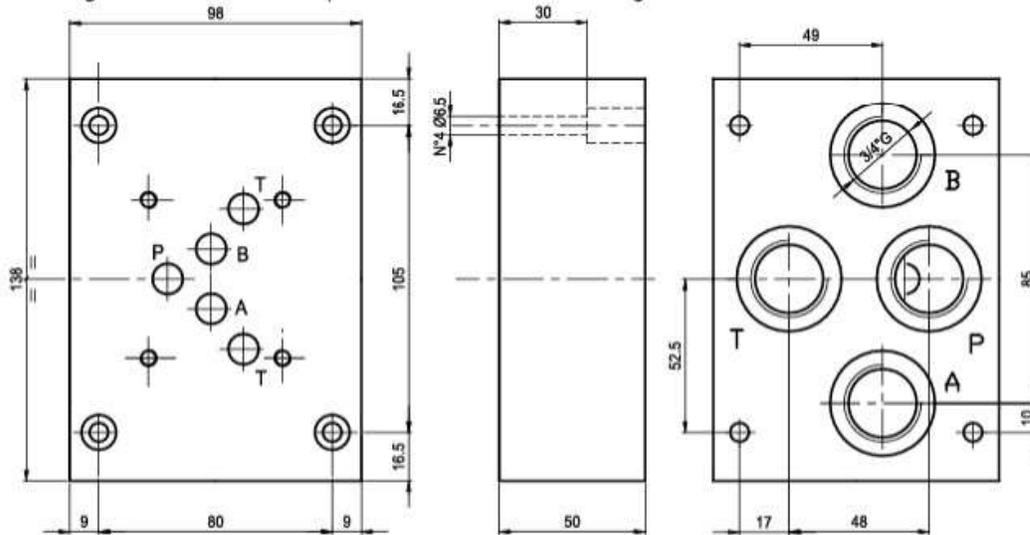

Ordering code:

Esempio di ordinazione: **ES** **5** **C** **34** **P** — P = rear ports
= utilizzi posteriori

subplate = S

Base singola =

CETOP 5


34 = 3/4"G

C = model/Modello

Hydraulic symbol
Schema idraulico



CETOP 5 - NG10

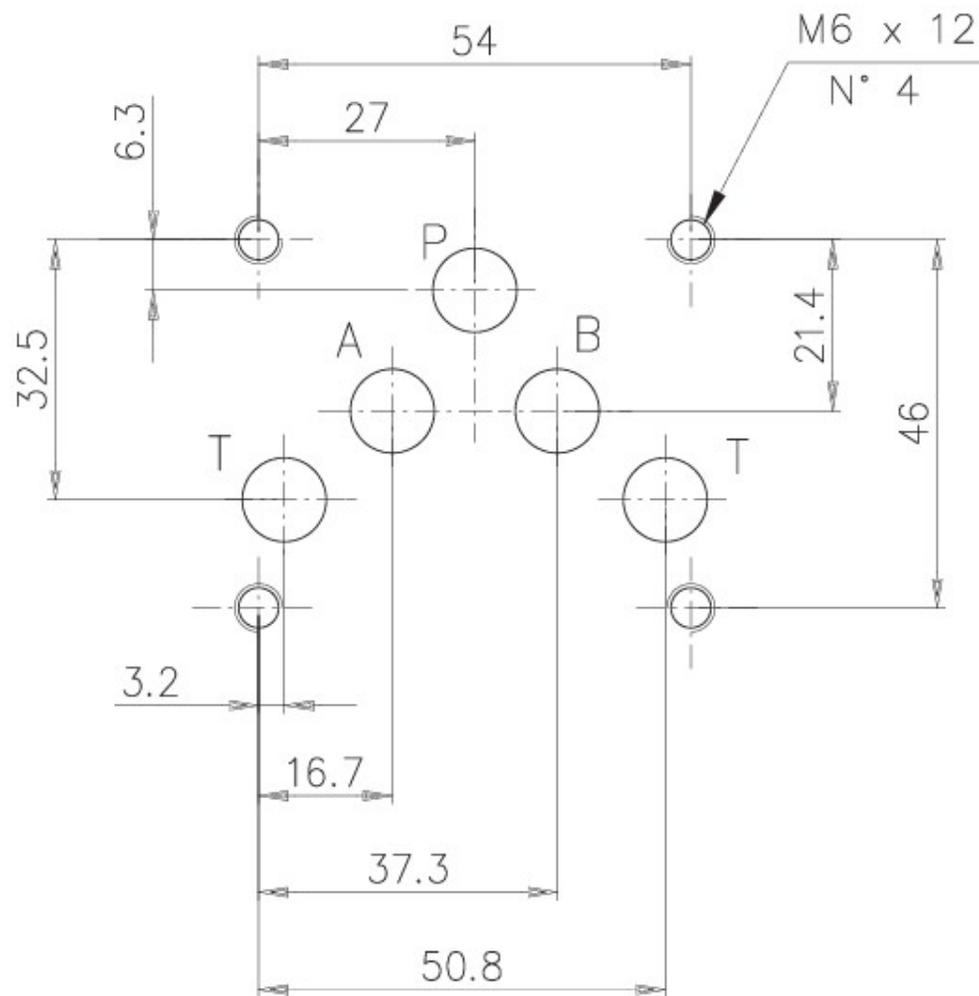


TECHNICAL NOTES
TECHNISCHE ANMERKUNGEN



Ports dimensions – Threads UNI-ISO 228
 Anschlusse Abmessungen – Gewinde UNI-ISO 228

Threads Gewinde A	øB		øC $\begin{matrix} + 0.5 \\ - 1.0 \end{matrix}$	øD $\begin{matrix} + 2.0 \\ - 0.5 \end{matrix}$	øE $\begin{matrix} + 1.0 \\ + 0 \end{matrix}$	øF _{MAX}
	min	max				
G 1/8" (9.7)	8,5	8,75	14	10	17	10
G 1/4" (13.1)	11,5	11,75	16	12	22	13,4
G 3/8" (16.6)	15	15,25	17	12,5	25	16,9
G 1/2" (20.9)	18,8	19,1	20	15	29	21,2
G 3/4" (26.4)	24,3	24,6	22	17	36	26,7
G 1" (33.2)	30,3	30,6	28	21	46	33,6
G 1"1/4 (41.9)	39,2	39,7	30	23	55	42,3
G 1"1/2 (47.8)	45	45,6	32	25	64	48,2
G 2" (59.6)	57	57,5	36	28	75	60

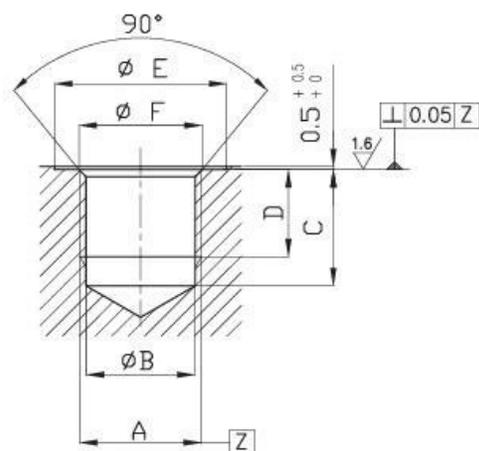

PRODUCT PRESENTATION
PRODUKTPRÄSENTATION



The sub-plates represented in the following catalogue have fixing holes in compliance with DIN 24340 standards, with sizes NG6 - NG10 - NG16 - NG25.

The products are made of cast iron GG25, according to UNI EN 1561 standard. The O-ring seals fitted on the plates and valve are made of nitrilic - NBR - 70 Shore mix.

The manifolds series EM..., the sub-plates series ES...(NG16-NG25) and the plates series ET... are protected externally with a coat of water bicomponent polyurethane enamel in a shining black colour type RAL 9005.

All the other series are supplied with manganese phosphate coat according to UNI ISO 9717 norm.

In the case of sub-plates fitted with seat for pressure reducing valve, the "Z" version is to be considered only for predisposition of same and is therefore supplied with ETV.. plug.

In the case of plates with 2/2 electric cartridge seat, the "K" version is to be considered only for the predisposition of same and is therefore supplied without ETVEI plug.

Valve coupling flat surface finish Ra 0.8 microns.

All the plates have been checked in relation to directive 97/23 (PED), and are not subject to CE marking (article 3, paragraph 3).

Sub plates are made of material and with thread suitable for cylindrical fitting. The product is not granted for assembling with conical fittings.